


LOW VOLTAGE TRANSFORMER FOR HALOGEN LIGHTING

SECTION C LOW VOLTAGE TRANSFORMER FOR HALOGEN LIGHTING

Halogen Transformers - Hardware C2 - C4

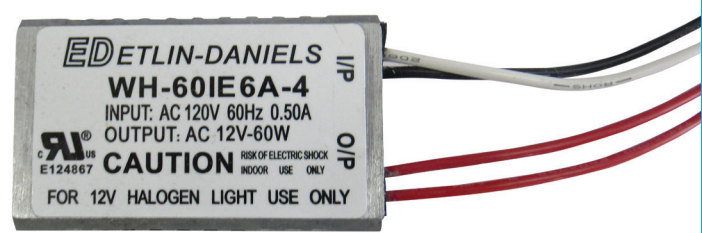

LOW VOLTAGE TRANSFORMER FOR HALOGEN LIGHTING

C2

ELECTRONIC TRANSFORMERS


- Compact and light weight when compared to conventional magnetic transformers, allowing a whole new element of design flexibility
- Many models are dimmable using conventional or electronic dimmers, from zero to full gradient capacity
- All units are enclosed in an epoxy sealed, fire retardant plastic case which can withstand severe environmental conditions and large temperature changes
- They can be used to power a single or multiple lamp application as long as they do not exceed the transformer's rating
- Most models offer a Class 2 safety rating

- Most models have integrated short circuit and overload protection, which will shut down the output and automatically reset when the condition is corrected
- 100% factory tested
- Easily mounted using an optional high temperature doubled sided adhesive tape to any clean surface, or by using special mounting adapter plates
- Many models to choose from, one will be right for your application
- Consult factory for more options

Low Voltage Transformers


- All models are Class 2 Listed and have an efficiency of >98%
- Standard case colour is Black
- For White add W to end of product number

Typical Wiring Diagram

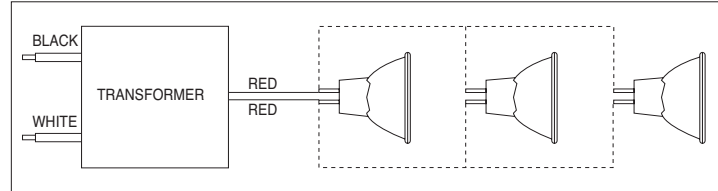

60 WATT MAX TRANSFORMER

- INPUT VOLTS 120V -MINIMUM LOAD 20W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE
- OUTPUT LEADS 6" RED TEW, 4 LEADS OUT ONE END
- SIZE 2.48" L X 1.49"W X 1.06"H (63mmX38mmX27mm)
- NON-DIMMABLE
- UR, cUR

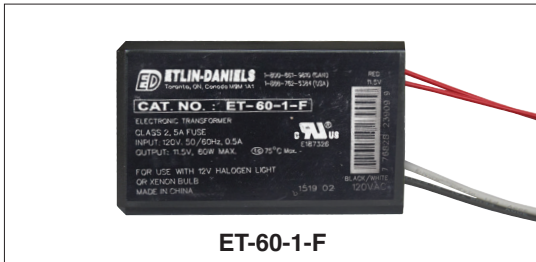

60 WATT MAX TRANSFORMER WITH CONNECTOR

- INPUT VOLTS 120V -MINIMUM LOAD 20W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE
- OUTPUT LEADS 6" WHITE TEW, 4 LEADS OUT ONE END, JST CONNECTOR
- SIZE 2.48" L X 1.49"W X 1.06"H (63mmX38mmX27mm)
- NON-DIMMABLE
- UR, cUR



60 WATT MAX PLUG IN TRANSFORMER

- INPUT VOLTS 120V -MINIMUM LOAD 10W
- OUTPUT VOLTS 11.5Vdc
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE WITH WALL PLUG, 6.5' SPT-2 LEAD/CONNECTOR
- OUTPUT LEAD 6.5' BLACK CORD
- SIZE 2.56" L X 1.93"W X 1.73"H (65mmX49mmX44mm)
- NON-DIMMABLE
- UR, cUR



60 WATT MAX PLUG IN TRANSFORMER

- INPUT VOLTS 120V -MINIMUM LOAD 10W
- OUTPUT VOLTS 11.5Vdc
- SHORT CIRCUIT PROTECTED, AUTO RESET
- WHITE PLASTIC CASE WITH WALL PLUG, 6.5' SPT-2 LEAD/CONNECTOR
- OUTPUT LEAD 6.5' WHITE CORD
- SIZE 2.56" L X 1.93"W X 1.73"H (65mmX49mmX44mm)
- NON-DIMMABLE
- UR, cUR



TRANSFORMERS

ELECTRONIC TRANSFORMERS



WH-601E5A-3

60 WATT MAX TRANSFORMER WITH HI-LO FEATURE

- INPUT VOLTS 120V -MINIMUM LOAD 10W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- BLACK PLASTIC CASE
- OUTPUT LEADS 6" RED/2X6"WHITE, 30/60 OUTPUT, HI-LO, 4 LEADS OUT END
- SIZE 2.55" L X 1.37"W X 1.02"H (65mmX35mmX26mm)
- DIMMABLE
- UR, cUR



WH-601E6A-2

60 WATT MAX TRANSFORMER

- INPUT VOLTS 120V -MINIMUM LOAD 10W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE
- OUTPUT LEADS 6" RED TEW, 2 LEADS OUT EACH END
- SIZE 3.15" L X 1.44"W X 1.03"H (80mmX36.5mmX23mm)
- DIMMABLE
- UR, cUR



WH-601E6A-3

60 WATT MAX TRANSFORMER

- INPUT VOLTS 120V -MINIMUM LOAD 10W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE
- OUTPUT LEADS 6" RED TEW, 4 LEAD OUT ONE END
- SIZE 2.60" L X 1.38"W X .78"H (67mmX35mmX20mm)
- DIMMABLE
- UR, cUR



WH-601E6A-4

60 WATT MAX TRANSFORMER WITH ALUMINUM CASE

- INPUT VOLTS 120V -MINIMUM LOAD 10W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- ALUMINUM CASE
- OUTPUT LEADS 6" RED TEW, 4 LEADS OUT ONE END
- SIZE 2.55" L X 1.38"W X 1.02"H (65mmX35mmX26mm)
- DIMMABLE
- UR, cUR



WH-801E6A

80 WATT MAX TRANSFORMER

- INPUT VOLTS 120V- MINIMUM LOAD 20W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE
- OUTPUT LEADS 6" RED TEW, 2 LEADS OUT EACH END
- SIZE 2.55" L X 1.38"W X 1.02"H (65mmX35mmX26mm)
- DIMMABLE
- UR, cUR

FOR MORE INFORMATION PLEASE CALL 1-800-661-9610 (HEAD OFFICE) 1-888-762-5384 (USA)

PLEASE CONSULT THE FACTORY FOR MORE PRODUCTS AND CUSTOMIZATION.
PRODUCT DETAILS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.





WH-801E6A-3

80 WATT MAX TRANSFORMER WITH ALUMINUM CASE

- INPUT VOLTS 120V- MINIMUM LOAD 20W
- OUTPUT VOLTS 11.5Vdc
- MINI HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- ALUMINUM CASE
- OUTPUT LEADS 6" RED TEW, 4 LEADS OUT ONE END
- SIZE 2.09" L X 1.30"W X .70."H (53mmX33mmX21mm)
- DIMMABLE
- UR, cUR



WH-1201E6A

105 WATT MAX TRANSFORMER

- INPUT VOLTS 120V -MINIMUM LOAD 35W
- OUTPUT VOLTS 11.5Vdc
- HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE WITH CENTER HOLE FOR MOUNTING
- OUTPUT LEADS 6" RED TEW, 2 LEADS OUT OF EACH END
- SIZE 4.31" L X 1.81"W X 1.25"H (110mmX46mmX32mm)
- DIMMABLE
- UR, cUR



WH-1601E6A

150 WATT MAX TRANSFORMER

- INPUT VOLTS 120V- MINIMUM LOAD 35W
- OUTPUT VOLTS 11.5Vdc
- HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE WITH CENTER HOLE FOR MOUNTING
- OUTPUT LEADS 6" RED TEW, 2 LEADS OUT OF EACH END
- SIZE 4.31" L X 1.81"W X 1.25"H (110mmX46mmX32mm)
- DIMMABLE
- UR, cUR



WH-2301E6A

230 WATT MAX TRANSFORMER

- INPUT VOLTS 120V- MINIMUM LOAD 35W
- OUTPUT VOLTS 11.5Vdc
- HALOGEN TRANSFORMER, COMPACT SIZE
- SHORT CIRCUIT PROTECTED, AUTO RESET
- BLACK PLASTIC CASE WITH CENTER HOLE AND AL HEAT SINK
- OUTPUT LEADS 6" RED TEW, 2 LEADS OUT OF EACH END
- SIZE 4.31" L X 1.81"W X 1.25"H (110mmX46mmX32mm)
- DIMMABLE
- UR, cUR