# **TBRL -** T-BAR ROUNDED

#### General

Recessed troffer fixture for grid ceiling offering a new fresh look with ample lighting and smooth appearance.

An excellent alternative to standard outdated T-Bar troffer for commercial or office applications.

#### **Housing & Finishing**

Die-formed cold rolled steel finished in pre-painted high-gloss white. BWE parabolic reflector for improved efficiency.

#### Lens

The rounded lens is made of white opal acrylic.

#### Electrical

Standard easy access wiring plate.

Available in electronic ballasts only.

Available voltages: 120V/277V/347V and UNV.


#### Approval

CSA certified for Canada & U.S.

| Project      |         |  |
|--------------|---------|--|
| Catalog #    |         |  |
| Volts        | Lamp(s) |  |
| Ballast Type |         |  |
| Туре         | Date    |  |
| Approved by  |         |  |




## **Ordering Information**

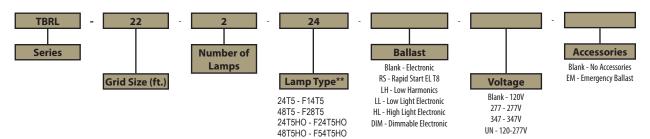

## **Product Availability** T5HO only

| Item        | Dimensions     | Lamps/        | Lamps/  | Lamp Watt |    |      |
|-------------|----------------|---------------|---------|-----------|----|------|
|             | (L x W x D)    | Cross Section | Fixture | T8        | T5 | Т5НО |
| TBRL 22-224 | 24" x 24" x 4" | 2             | 2       |           |    | 24   |
| TBRL 22-324 | 24" x 24" x 4" | 3             | 3       |           |    | 24   |
| TBRL 24-248 | 48" x 24" x 4" | 2             | 2       |           |    | 54   |
| TBRL 24-348 | 48" x 24" x 4" | 3             | 3       |           |    | 54   |



### NOTE:

Special order. Minimum qtys. or set-up charges may apply. T5HO ONLY. N/A in T8 or T5 See our LED version R RL series.

#### LED TUBE DISCLAIMER

Pioneer fluorescent fixtures are designed and CSA listed *only* for the fluorescent lamps as indicated on the fixture label. Pioneer cannot guarantee proper operation of any other lamp types installed, including LED tubes. This will void the original factory warranty and Pioneer will not be responsible for any costs or damages incurred as a result. It is the sole responsibility of the LED tube supplier to confirm compatibility with our ballasts.

See our Terms and Conditions of Sale, paragraph 9 - Warranties and Remedies