

# LED LAMP

VIVID Series



## LED T8 BYPASS TUBE VIV-T8BPSP4/120-347V



5-year limited warranty

Operating temperature range -20 °C ~ +45 °C




### Features & Benefits

- cUL listed, DLC approved
- PET film, ShatterProtect<sup>1</sup>, 120-347V
- External ballast not required, use existing lamp holders (non-shunted / shunted)
- Double-ended installation
- Our safety features allow for installation as well as misapplication protection<sup>2</sup>
- High CRI (83+), beam angle 180°, 50000 hour life (L70)
- NSF/ANSI 2 certified<sup>3</sup>

<sup>1</sup> ShatterProtect utilizes PET film to reduce the unexpected risk of shattering <sup>3</sup> Need to work with NSF certified lighting fixtures.  
<sup>2</sup> Contact your local Turolight representative for detail

### Dimensional Drawing

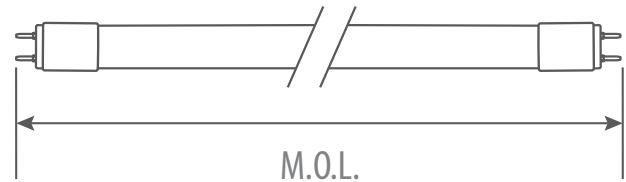

### Ordering Information Example: VIV-T8BPSP4/7W/35/F/DE/120-347V

Family Name	Lamp Type	Wattage	CCT	Frost	Installation	Voltage
VIV (Vivid)	T8BPSP4	7W 11.5W 12W	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)	F (Frost)	DE (Double-ended)	120-347V

### Product Specification

Ordering Code	DLC	Model Number	Watts (W)	Voltage (V)	Initial Lumen (lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
<b>T8 Bypass, 120-347V, 50000hrs, Double-ended, DLC</b>												
-	-	VIV-T8BPSP4/7W/35/F/DE/120-347V (2FT)	7	120-347	950	G13	50,000	180°	3500	83	24	8
1752426	-	VIV-T8BPSP4/7W/40/F/DE/120-347V (2FT)	7	120-347	1000	G13	50,000	180°	4000	83	24	8
-	-	VIV-T8BPSP4/7W/50/F/DE/120-347V (2FT)	7	120-347	1000	G13	50,000	180°	5000	83	24	8
-	-	VIV-T8BPSP4/12W/35/F/DE/120-347V/3FT	12	120-347	1450	G13	50,000	180°	3500	83	36	8
1752427	-	VIV-T8BPSP4/12W/40/F/DE/120-347V/3FT	12	120-347	1500	G13	50,000	180°	4000	83	36	8
-	-	VIV-T8BPSP4/12W/50/F/DE/120-347V/3FT	12	120-347	1550	G13	50,000	180°	5000	83	36	8
-	Yes	VIV-T8BPSP4/11.5W/30/F/DE/120-347V (4FT)	11.5	120-347	1700	G13	50,000	180°	3000	83	48	25
-	Yes	VIV-T8BPSP4/11.5W/35/F/DE/120-347V (4FT)	11.5	120-347	1750	G13	50,000	180°	3500	83	48	25
1752430	Yes	VIV-T8BPSP4/11.5W/40/F/DE/120-347V (4FT)	11.5	120-347	1800	G13	50,000	180°	4000	83	48	25
1752517	Yes	VIV-T8BPSP4/11.5W/50/F/DE/120-347V (4FT)	11.5	120-347	1800	G13	50,000	180°	5000	83	48	25