

**Presented By:** Candela Corporation  
**Contact Phone:** (800) 922-9226  
**Contact E-mail:** sales@candelacorp.com



**Customer Name:**  
**Project Name:**  
**Fixture Type:**



GE  
Lighting

## 20575 - 240 PAR 56 VNSP

GE PAR56 - Very Narrow Spot

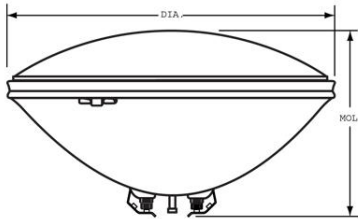

### CAUTIONS & WARNINGS

#### Warning

- Risk of Fire
  - Keep combustible materials away from lamp.
- Risk of Electric Shock
  - Turn power off before inspection, installation or removal.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Use in enclosed fixture rated for this product.
  - Avoid direct water/liquid contact.

### NOTES

- For use with heat-resistant connector supported by bulb rim or metal shell of base.
- Lamp is made of heat resistant glass (HRG).

### GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR56
Base	Screw Terminals
Filament	C-6
Wattage	240
Voltage	12
Rated Life	2000 hrs
Primary Application	Very Narrow Spot

### PHOTOMETRIC CHARACTERISTICS

Beam Spread - Horizontal	7.0 - 10.0 °/9.0 - 50.0 °
Beam Spread - Vertical	10.0 - 10.0 °/6.0 - 50.0 °
Center Beam Candlepower (CBCP)	140000
Color Temperature	2800 K

### DIMENSIONS

Maximum Overall Length (MOL)	4.5000 in(114.3 mm)
Bulb Diameter (DIA)	7.000 in(177.8 mm)
Bulb Diameter (DIA) (MAX)	7.000 in(177.8 mm)

### PRODUCT INFORMATION

Product Code	20575
Description	240 PAR 56 VNSP
Standard Package	Case
Standard Package GTIN	10043168205754
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168205757