

# LED FIXTURE

## SSL Series



# LED Linear High Bay SSL-LHB3

Offering quality lighting and excellent energy savings compared to linear fluorescent and HID high bay fixtures.



### Features & Benefits

cUL listed, DLC Premium

Available with lumen outputs from 11,475 to 34,425 lumens

System light efficacy  $\geq 130$  lm/W

120-347V Auto-sensing driver

1-10V dimming

Damp location rated, L70@ 100,000Hrs

CRI >80

Formed steel housing with white powder coat finish/ Frosted lens

120° Beam spread

10' White Cord, 10' Aircraft Cable (set)

### Warranty


5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +50°C

### Applications

Warehouse, Factory, Convention Center, Gymnasium etc.

### Dimensional drawing

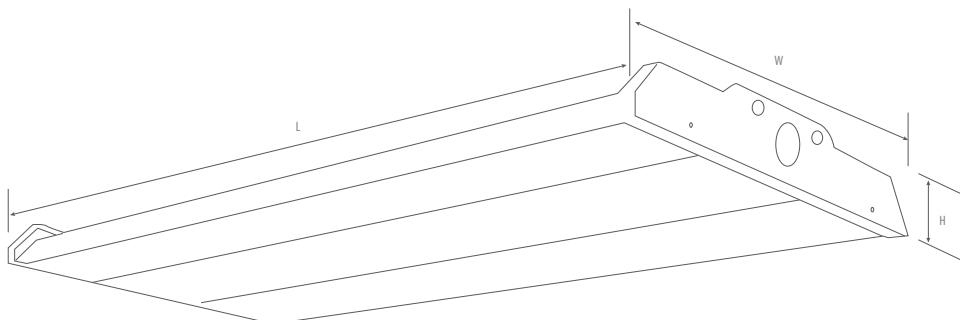

	L	W	H
85W,130W,170W	24.8"	15"	2"
255W	24.8"	18.90"	2"



# LED Linear High Bay

## SSL-LHB3

### Ordering Information Example: SSL-LHB3/85W/40/120-347V/AC/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Mounting	Dimmable
SSL (Solid State Lighting)	LHB3 (Linear High Bay)	85W 130W 170W 255W	40 (4000K) 50 (5000K)	120-347V	AC (Aircraft Cable 10' set)	D (Dimmable)

### Product Specification

Ordering Code	DLC (Premium)	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.	
3666307	Y	SSL-LHB3/85W/40/120-347V/AC/D	85	120-347V	100,000	11475	4000	>80	24.8" x 15" x 2"	1	
3666308	Y	SSL-LHB3/85W/50/120-347V/AC/D	85	120-347V	100,000	11475	5000	>80	24.8" x 15" x 2"	1	
3667300	Y	SSL-LHB3/130W/40/120-347V/AC/D	130	120-347V	100,000	17550	4000	>80	24.8" x 15" x 2"	1	
3667301	Y	SSL-LHB3/130W/50/120-347V/AC/D	130	120-347V	100,000	17550	5000	>80	24.8" x 15" x 2"	1	
3667302	Y	SSL-LHB3/170W/40/120-347V/AC/D	170	120-347V	100,000	22950	4000	>80	24.8" x 15" x 2"	1	
3667303	Y	SSL-LHB3/170W/50/120-347V/AC/D	170	120-347V	100,000	22950	5000	>80	24.8" x 15" x 2"	1	
3668301	Y	SSL-LHB3/255W/40/120-347V/AC/D	255	120-347V	100,000	34425	4000	>80	24.8" x 18.9" x 2"	1	
3668302	Y	SSL-LHB3/255W/50/120-347V/AC/D	255	120-347V	100,000	34425	5000	>80	24.8" x 18.9" x 2"	1	
3660090		SSL-LHB2/MWG	Medium wire guard (for 90W, 135W, 175W LHB2 & 85W, 130W, 170W LHB3)							25" × 15"	1
3660091		SSL-LHB2/LWG	Large wire guard (for 265W LHB2 & 255W LHB3)							25" × 19"	1