




LED FIXTURE

RIGID Series

LED Flat Panel

PRO-FP2

Ultra Slim LED Flat Panel Luminaire

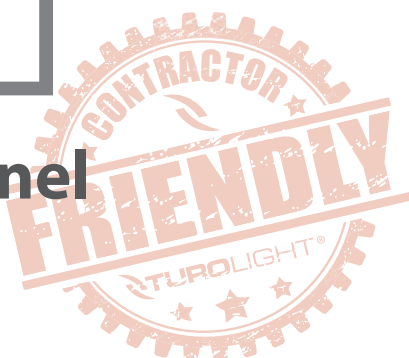

Features & Benefits

CUL listed, DLC*

CRI >80

Ultra slim design, no UV & IR emission

3 Convenient sizes

120-277V LED Driver, PF >0.95

L70 @ 50,000 Hrs

Large wiring box

0-10V Dimmable

Aluminum frame, PMMA Opal lens

120° Beam spread

Excellent illuminating surface uniformity

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +60°C

* DLC under qualifying process Q1, 2020

Applications

Commercial/ Industrial/ Retail location

For use in Offices, Stores, Bank, Airport, Show-room, Restaurant etc.

Installation suspension/ surface mounted/ recessed drywall & T-Bar applicable

Dimensional drawing



	L	W	H
2'x2'	23 3/4"	23 3/4"	2"
1'x4'	11 3/4"	47 3/4"	2"
2'x4'	23 3/4"	47 3/4"	2"

Ordering Information

Example: PRO-FP/22/40W/10/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable
PRO	FP2 (Flat Panel)	14 (1'x4')	40W	40 (4000K)	UNV (120-277V)	D (0-10V Dim)
		22 (2'x2')	40W			
		24 (2'x4')	50W			

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3665158	Yes	PRO-FP2/22/40W/40/UNV/D	40	120-277V	50,000	4000	4000	>80	24X24	2
3665159	Yes	PRO-FP2/14/40W/40/UNV/D	40	120-277V	50,000	4000	4000	>80	12X48	2
3665160	Yes	PRO-FP2/24/50W/40/UNV/D	50	120-277V	50,000	5000	4000	>80	24X48	1