



PAR30 LED with AirFlux Technology

13PAR30S/END/4000K/F25 DIM 6/1

Philips PAR30 Dimmable LED Lamps with AirFlux Technology provide optimal thermal efficiency in a sleek, lightweight design.

Product data

• General Characteristics

Cap-Base	E26
Bulb	PAR30S [PAR30S mm]
Rated Avg. Life (Hours)	45000 hr
Rated Lifetime (years)	41.1 an

• Light Technical Characteristics

Color Code	CW
Color Designation	Cool White
Beam Angle	25 D
Beam Description	25D [Medium beam]
Correlated Color Temperature	4000 K
Approximate Lumens	750 Lm
Approx. MBCP	3200 cd
CRI	80
Luminous Efficacy Lamp	57.69 Lm/W
Color Temp. (Kelvin)	4000 K [CCT 4000K]
Rated Luminous Flux	750 Lm

• Electrical Characteristics

Wattage	13 W
Wattage Technical	13 W
Voltage	120 V
Line Frequency	60 Hz

Power Factor	0.73 -
Lamp Current mA	150 mA
Dimmable	Yes
Wattage Equivalent	75 W
Starting Time	0.5 s

• Measuring Conditions

Switching cycle	20000x
-----------------	--------

• Product Dimensions

Overall Length C	88.8 mm
Overall Length C [inch]	3.496 (max) in
Diameter D	92 mm


• Product Data

Product number	425389
Full product name	13PAR30S/END/4000K/F25 DIM 6/1
Short product name	13PAR30S/END/4000K/F25 DIM 6/1
Pieces per Sku	1
eop_pck_cfg	6
Skus/Case	6
Bar code on pack	46677425388
Bar code on case	50046677425383
Logistics code(s)	929000230504
eop_net_weight_pp	0.310 kg



PHILIPS

Dimensional drawing

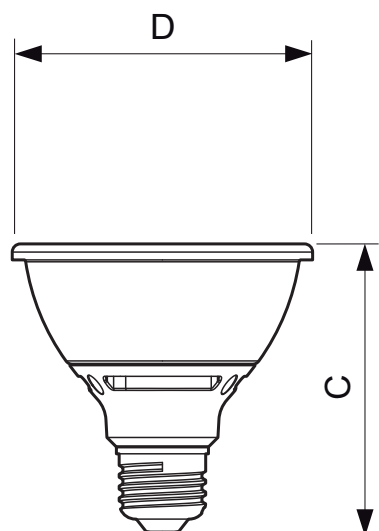

E26

13PAR30S/END/4000K/F25 DIM 6/1

Product	C (Norm)	C1 (Max)	D (Norm)	D1 (Norm)
LED 13W E26 4000K 120V PAR30S 25D DIM	88.8	3.496	92	3.622



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 15
data subject to change