

LED Doorway Light



SSL-DW2	Segment	Wattage Range	Lumen Range
	Universal	15W, 26W Selectable Wattage (15W-30W)	1,875-3,741lm

Features

- Modern design compact wallpack with glass diffuser for long life.
- IP65 wet location rated with operating temperature range of -40 °C ~ + 40 °C.
- Field selectable (CCT 3000K, 4000K & 5000K) and wattage (15W, 26W & field selectable 15W – 30W in 30L model).
- Efficacy of ≥ 115 lm/W with 120-277V UNV LED driver



Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover

Mounting:

Surface Mounting

Driver:

120-277 V UNV LED driver with Operating temperature range of -40 °C ~ + 40 °C

LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 115 lm/w.

Controls:


Compatible with 0-10V Dimming, Photocell Sensor.



Dimensional Drawing

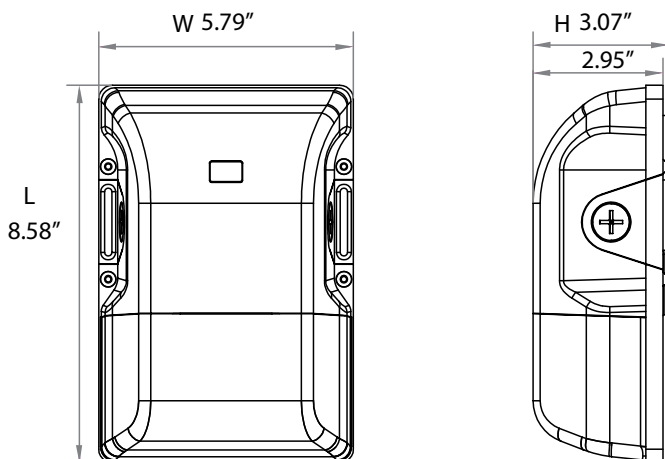

Polar Candela

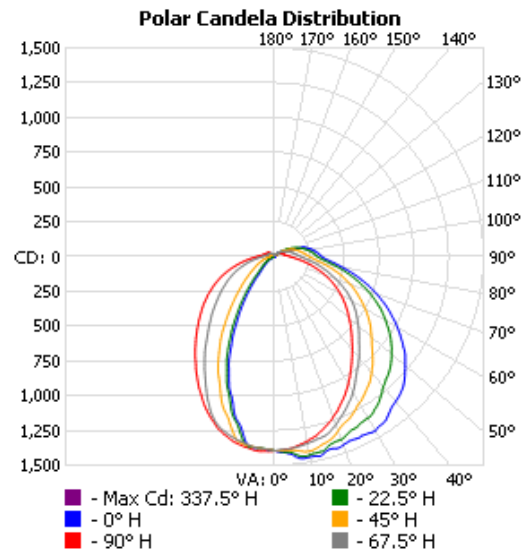

Applications



Malls



Hotels



Industry



Office Complex

LED Doorway Light



SSL-DW2	Segment	Wattage Range	Lumen Range
	Universal	15W, 26W Selectable Wattage (15W-30W)	1,875-3,741lm

Ordering Information Example: SSL-DW2/15W/MK/UNV/PC/DB

Family Name	Fixture Type	Wattage	CCT	Voltage	Photocell	Finish
SSL (Solid state lighting)	DW2 (LED doorway light)	15W 26W 30L/MW (Max. 30W, Selectable Wattage)	MK (Selectable Kelvin/CCT)	UNV (120-277V)	PC (Default)	DB (Dark bronze)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3662157	-	SSL-DW2/15W/MK/UNV/PC/DB	15	120-277V	50,000	1950	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10
3664152	-	SSL-DW2/26W/MK/UNV/PC/DB	26	120-277V	50,000	3225	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10
3680102	Yes	SSL-DW2/30L/MW/MK/UNV/PC/PB	30-22-15	120-277V	50,000	3741-2750-1875	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10

Related Products



SSL-WP3T



SSL-WP1TS



SSL-WP2T



DL-VT2