

Date: _____
 In hands date of project: _____
 Project name/Number: _____
 Name of distributor: _____
 Client #: _____
 Name of end user: _____

ORDERING INFORMATION

Order code: 65674
 Description: LED/CA11/S2/4.8W/27K/E12/V/FIL/STD
 UPC: 69549656741
 Case quantity: 80


PERFORMANCE DATA

Type: LED Filament
 Shape: CA11
 Wattage (W): 4.8
 Base: E12
 Lamp voltage (VAC): 120
 Finish: Clear
 Colour temperature (K): 2 700
 Life (hrs): 15 000
 Lumen Output-LM79 (lm)*: 398
 Lumens per watt (lm/W): 83
 Traditional equivalent: 60
 CRI: 80
 Beam angle: 360°
 Power factor: 0.93
 Operating temperature range: -20°C/68°F to 40°C/104°F
 Burning position: Universal
 Dimmer Type: Forward Phase
 Energy Star approved: No
 Suitable for Enclosed Fixture: No

*Initial lumens range: +/- 5 % **Typical colour temperature range: +/- 5 %



¹ Based on an average daily usage of 3 hours.

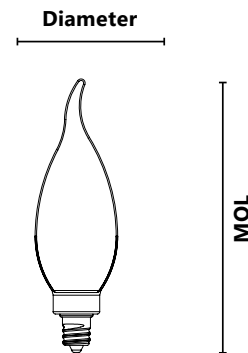

Dia. : 1 3/8 in. (35 mm)
MOL : 4 11/32 in. (110 mm)

ORDERING INFORMATION

Order code: 65674
 Description: LED/CA11/S2/4.8W/27K/E12/V/FIL/STD
 UPC: 69549656741
 Case quantity: 80

COMPATIBLE DIMMER LIST

Cooper 9531AW, DAL06P, SLC03P
Leviton 6615, IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ
Lutron DVCL-153P, AYCL-253P

CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Not for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit www.standardpro.com.
- Operating temperature: - 20 °C / - 4 °F to 40 °C / 104 °F.

Qty	Description	Price

I accept the specifications of the lamp configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____