

# Technical Information Bulletin

## LED Lamps




Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 67944  
Description: G9HO/S3/5W/30K/FR/STD  
UPC: 69549679443  
Case quantity: 50 / 200

### PHYSICAL DATA

Base: G9  
Shape: JD  
Type: LED General Purpose /  
G9 High Output

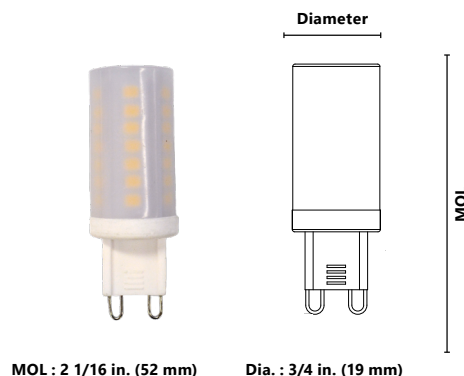

### PERFORMANCE DATA

Watts (W): 5  
Volts (VAC): 120  
Colour temperature (K)\*\*: 3 000  
Life L70 (hrs): 50 000  
Initial lumens (lm)\*: 430  
Initial lumens per watt (lm/W): 86  
CRI: 80  
Beam angle: 360  
Power factor: 0.9  
Operating temperature range: -20 °C to 40 °C (-4 °F to 104 °F)

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %

### COMPATIBLE DIMMERS

<b>Lutron</b>	PD-6WCL, PD-5NE, DVCL-153P <sup>1</sup> , CTCL-153P, DVCL-253P, AYCL-253P <sup>2</sup> , DVRP-253P-WH, SELV-300P, MACL-153P
<b>Cooper</b>	RRD-6NA-WH, AAL06 <sup>1</sup> , SLC03P
<b>Leviton</b>	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
<b>Legrand</b>	RH703PTUTC

<sup>1</sup> Flickering at low settings

<sup>2</sup> Quick flash at start



- Usage in enclosed fixtures or at temperatures above the recommended operating temperature may reduce lamp life.
  - Suitable for damp location
  - Operating temperature: 20 °C/-4 °F to 40 °C/104 °F
  - 3 Years Limited Warranty.
  - This device is not intended for use with emergency exit fixtures or lights.
- For complete warranty and dimmer information visit [www.standardpro.com](http://www.standardpro.com).

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
Data is based upon tests performed in a controlled environment and representative of relative performance.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 5, 2024