

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# DECORATIVE LED LAMPS

## Filaments

### ORDERING INFORMATION

**Order code:** 68943  
**Model number:** G16.5/S4/5W/30K/E12/V/FIL/STD  
**UPC:** 069549022690  
**Case quantity:** 10 / 100

### PHYSICAL DATA

**Shape:** G16.5  
**Base:** E12  
**Finish:** Clear  
**Filament Type:** Vertical

### PERFORMANCE DATA

**Watts (W):** 5  
**Volts (VAC):** 120  
**Color temperature (K)<sup>1</sup>:** 3 000  
**Lumen output (lm)<sup>2</sup>:** 500  
**Efficacy (lm/W):** 100  
**Traditional equivalent (W):** 60  
**CRI:** 80  
**Life L70 (h)<sup>3</sup>:** 15 000  
**Beam angle (°):** 320°  
**Power factor (%):** 0.7  
**Frequency (Hz):** 60  
**Dimming:** Forward  
**Burning position:** Universal  
**Operating temp. range:** -20°C to 40°C / -4°F to 104°F

<sup>1</sup> Typical colour temperature range: +/- 5 %

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations

### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
LUTRON	PD-6WCL, RRD-6NA-WH, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P
COOPER	AAL06
LEVITON	6674, DDMX1

Dimming range: 10%-100%

<sup>1</sup>This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.



**2**<sup>yrs</sup>  
warranty

dimmable

damp location

enclosed fixture




ICES  
005

FCC

c UL US

**DIMENSIONS**

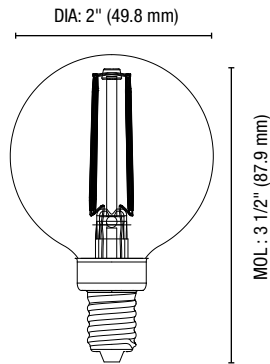

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_

Company: \_\_\_\_\_

Signature: \_\_\_\_\_

Date: \_\_\_\_\_

**Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.**