

Project: _____ Type: _____
 Drawn by: _____ Catalogue #: _____ Date: _____

Individual Spec Sheet

FLEXLED LED MODULE KIT

ORDERING INFORMATION

Order code: 66011
Model number: K/FLXLED/11.8W/30K/6TRM/WH/JBOX FRME/STD
UPC: 69549660113
Case quantity: 1

PHYSICAL DATA

Dimensions: 7 1/2" (191mm)
Shape: Round
Finish: White

PERFORMANCE DATA

Watts (W): 11.8
Volts (VAC): 120
Colour temperature (K)¹: 3 000
Lumen output (lm)²: 750
Lumen per Watts (lm/W): 64
CRI: 90+
Life L70 (h)³: 50 000
Beam angle (°): 88
THD (%): <20
Power factor: >0.9
Dimmable: Yes
Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations



5 yrs
warranty

**quick
ship**

**LED
fixture**

**dimmable
fixture**

airtight

**wet
location**


**IC
rated**

**Fire
rated**




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

DIMENSIONS

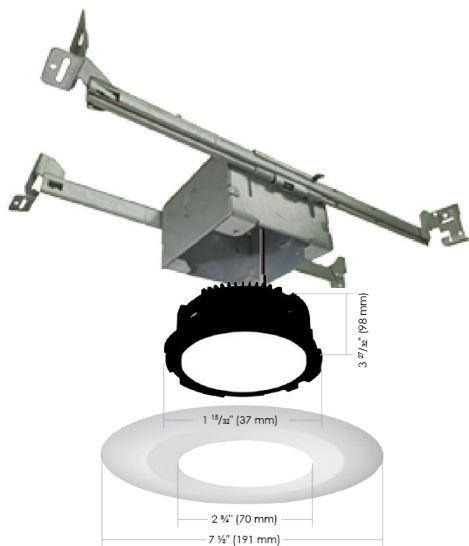PHOTOMETRIC DATA¹

66011 • K/FLXLED/11.8W/30K/6TRM/WH/JBOX FRME/STD • 820.4 lm

Polar candela distribution

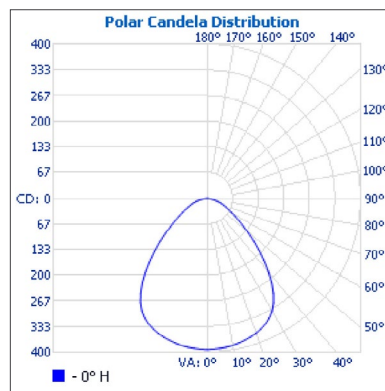

Zonal lumen summary

Zone	Lumens	% Fixture
0-30	310.5	37.9%
0-40	496.6	60.5%
0-60	736.4	89.8%
60-90	83.9	10.2%
70-100	29.4	3.6%
90-120	0	0%
0-90	820.4	100%
90-180	0	0%
0-180	820.4	100%

Illuminance at a distance

	Center beam fc	Beam width
1.7'	136	3.3'
3.3'	36.1	6.5'
5.0'	15.7	9.8'
6.7'	8.76	13.2'
8.3'	5.71	16.3'
10.0'	3.93	19.6'

■ Vert. spread: 89.0°

¹ Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____

Company: _____

Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.