

Series Spec Sheet

BSP4000

PHOTOLUMINESCENT RUNNING MAN ALUMINUM SIGN

FEATURES AND SPECIFICATIONS

• Features

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Aesthetically pleasing sign
- Designed for surface ceiling or flag end mounting
- Movable if egress paths changed
- Visible at 15.25 meters (50') for a minimum of 90 minutes
- Recyclable

• Installation

Surface mounted with available frame.
Before installation it must be determined that there is a minimum of 5 Fc (54 lux) of ambient light on the face(s) of the sign at all times during building occupancy.

• Compliances

- UL924 & CAN/ULC S572

• Technical

Application

Suitable for floor proximity installation. Can be used for both high-level and low-level applications.

Running Man Size Height

8"

Background

Photoluminescent

Illumination

Green illuminating

Visibility

15.25 meters (50') for a minimum of 90 minutes

Durability

Explosion-proof for areas requiring explosion-proof exit signage

Life expectancy


25+ years

Power requirements

No additional electrical or mechanical source required




ORDERING GUIDE - SIGN



Direction	
BSP4343AS -	Left arrow
BSP4973AS -	Straight thru
BSP4344AS -	Right arrow




ORDERING GUIDE - MOUNTING FRAME



Frame accessories	
PF4001AS1WBK -	Single face wall black
PF4001AS1CBK -	Single face ceiling black
PF4001AS1EBK -	Single face end black
PF4001AS2CBK -	Double face ceiling black
PF4001AS2EBK -	Double face end black
PF4001AS1WSI -	Single face wall silver
PF4001AS1CSI -	Single face ceiling silver
PF4001AS1ESI -	Single face end silver
PF4001AS2CSI -	Double face ceiling silver
PF4001AS2ESI -	Double face end silver

DIMENSIONS

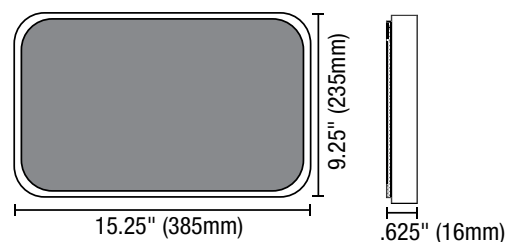

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.