

FLP3.5G-8W-30K FLP3.5G-8W-40K


TECHNICAL SPECIFICATIONS

- Sizes: 4 3/4" dia. x 1 1/4" H
- Colours: WH-White, BS-Brushed steel, BK-Black
- 120 VOLTS / LED 8 WATTS
- 550 LUMENS
- Beam angle: 38° / CRI : > 80
- Degrees Kelvin: 3000K or 4000K
- 3 7/8" hole to be drilled
- Closed endorsement, IC for insulated ceilings
- Approved for damp locations
- Junction box for hardwiring and driver included


ACCESSORIES AVAILABLE

- Plaster frame **PF-378**
- 6 ft extension **FLP-EX6**

RECESSED LIGHTING DIMENSIONS

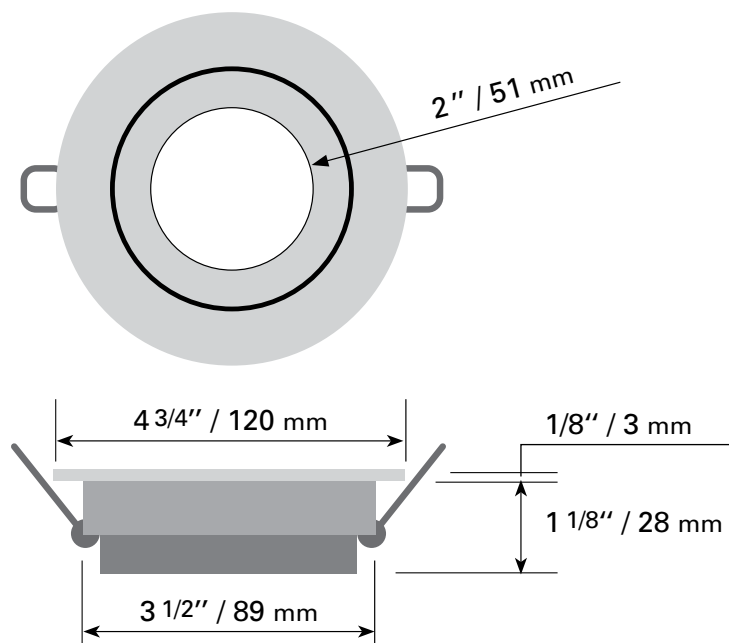

JUNCTION BOX DIMENSIONS

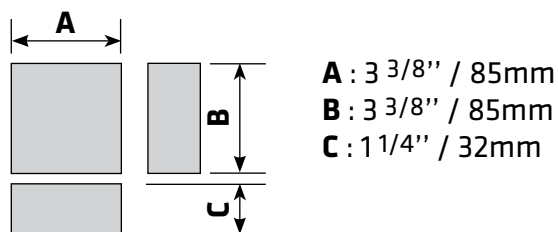

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM


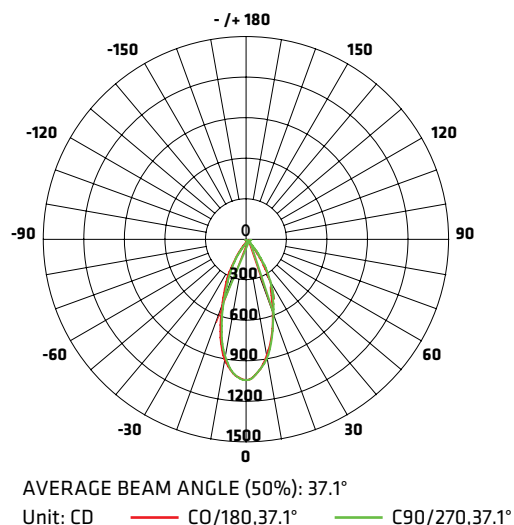



FIGURE AAI

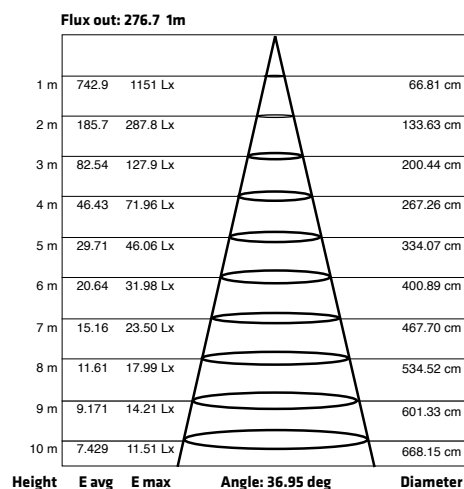


Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

EASY INSTALLATION


1.

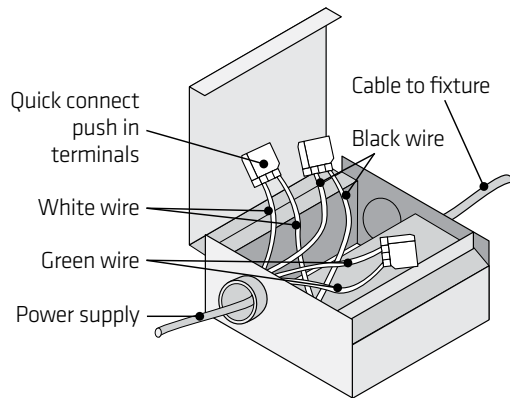

2.

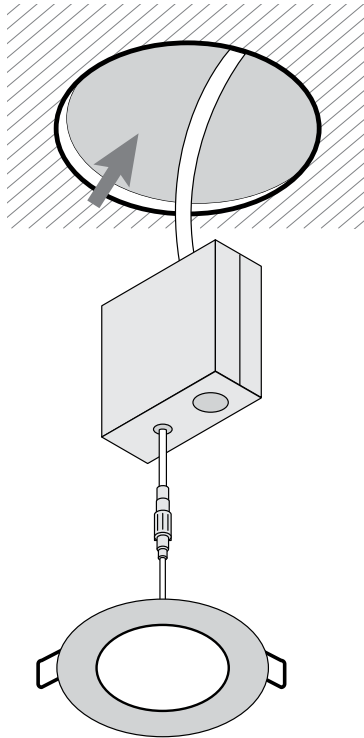

3.

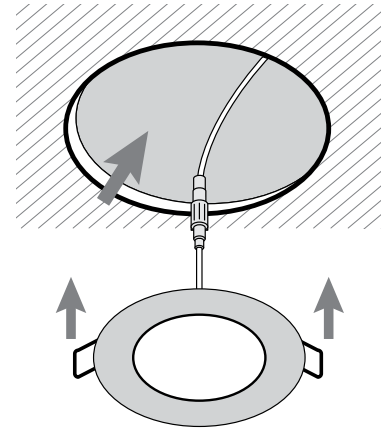

While our ultra-slim LED ceiling lights function with most dimmers and dimmers generally have a maximum 150-Watt rating for LED units, we strongly recommend that you not exceed 80% of this capacity in order to avoid lighting flicker when the dimmer is at its lowest setting. For example, we recommend a maximum of 8 6-inch units (120 Watts total) or 13 4-inch units (total 117 Watts).

CAUTION: ALWAYS CLOSE ELECTRICAL CURRENT BEFORE CONNECTING A LED DEVICE, otherwise the driver will be affected.