



KTEB-120-1-TP-EMI

T12 ELECTRONIC BALLAST



DESCRIPTION

1 x F20T12 | 120V | NPF | 6" Case | FCC Class B

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years




PRODUCT FEATURES

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD
F20T8	1	120	18.0	0.26	0.56	1.49	0.90	5.00	130
F20T12	1	120	18.0	0.26	0.56	1.49	0.90	5.00	130
F18T8	1	120	17.5	0.26	0.55	1.56	0.95	5.43	140
F17T8	1	120	18.5	0.27	0.56	1.52	1.00	5.41	140
F15T8	1	120	16.0	0.25	0.55	1.58	1.00	6.25	140
F15T12	1	120	16.0	0.25	0.54	1.56	1.00	6.25	140
F14T8	1	120	15.5	0.24	0.54	1.59	1.00	6.45	150
F14T12	1	120	15.5	0.24	0.54	1.59	1.00	6.45	150

WIRING DIAGRAMS

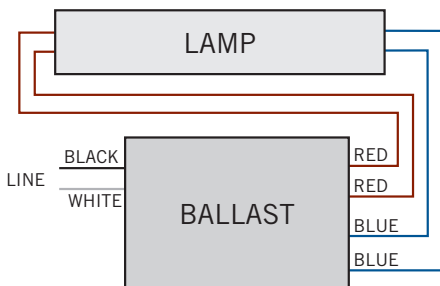



KTEB-120-1-TP-EMI

T12 ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS


	LENGTH	6.46"
	WIDTH	1.37"
	HEIGHT	1.00"
	MOUNTING	6.00"

STANDARD LEAD LENGTHS*

BLACK	12"
WHITE	12"
BLUE	18"
RED	18"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

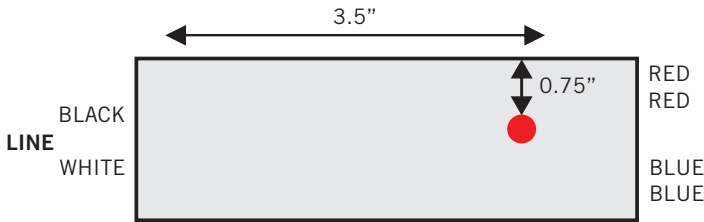

CATALOG NUMBER BREAKDOWN

KTEB-120-1-TP-EMI

