



Simply Brilliant



High CRI



Dimmable



Product information

FEATURES

- Multi-volt (120-347v) UFO High Bay
- High Lumen Efficacy 140LM/w
- DLC Premium, cUL listed
- 0-10v Dimmable
- Lumileds 3030 LEDs / Sosen driver
- 10FT cord and carabiner hook included
- Quick connect to motion sensor (pre-installed base)
- IP65 Rated for wet location
- 60,000 hour life L70@25°C
- 4KV Line-Line, 6KV Line-Earth surge prot.
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Healthcare
- Gymnasium
- Warehouse
- Museum
- Recreation Center


INSTALLATION

- Hook
- U-Bracket
- Pendant 3/4" NPS pipe


ADDITIONAL INFO

- Optional: a) White/Black Housing
- b) Reflector c) Microwave Sensor
- Operating Temperature -40°C ~+50°C

DIAGRAM

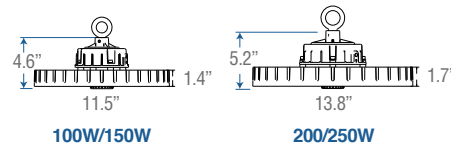

PHOTOMETRICS



ITEM NO.	MODEL NO.	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	IP	PF	MOL (IN)	CASE QTY.
L5330-1313	ILX-UHB-ST1-100W40MVD90L-R80HBL	ROUND HBAY 100W 140L/W MV 4K BK	100W	120-347v	14000	4000K	90°	65	0.9	11.5x4.6x1.4	1
L5330-1323	ILX-UHB-ST1-150W40MVD90L-R80HBL	ROUND HBAY 150W 140L/W MV 4K BK	150W	120-347v	21000	4000K	90°	65	0.9	11.5x4.6x1.4	1
L5330-1325	ILX-UHB-ST1-150W50MVD90L-R80HBL	ROUND HBAY 150W 140L/W MV 5K BK	150W	120-347v	21000	5000K	90°	65	0.9	11.5x4.6x1.4	1
L5330-1333	ILX-UHB-ST1-200W40MVD90L-R80HBL	ROUND HBAY 200W 140L/W MV 4K BK	200W	120-347v	28000	4000K	90°	65	0.9	13.8x5.2x1.7	1
L5330-1335	ILX-UHB-ST1-200W50MVD90L-R80HBL	ROUND HBAY 200W 140L/W MV 5K BK	200W	120-347v	28000	5000K	90°	65	0.9	13.8x5.2x1.7	1
L5330-1343	ILX-UHB-ST1-250W40MVD90L-R80HBL	ROUND HBAY 250W 140L/W MV 4K BK	250W	120-347v	35000	4000K	90°	65	0.9	13.8x5.2x1.7	1
L5330-1345	ILX-UHB-ST1-250W50MVD90L-R80HBL	ROUND HBAY 250W 140L/W MV 5K BK	250W	120-347v	35000	5000K	90°	65	0.9	13.8x5.2x1.7	1

OPTIONAL ACCESSORIES

L5330-8100	ILX-UHB-ST1-MS	MOTION SENSOR FITS ALL
L5330-8400	ILX-UHB-ST1-RC	REMOTE CONTROL
L5330-8610	ILX-UHB-ST1-UB1	U-BRACKET FITS 100-150W
L5330-8620	ILX-UHB-ST1-UB2	U-BRACKET FITS 200-250W
L5330-8810	ILX-UHB-ST1-RF1	AL REFLECTOR 90° FITS 100-150W
L5330-8820	ILX-UHB-ST1-RF2	AL REFLECTOR 90° FITS 200-250W

Toronto | Calgary | Halifax

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: csr@illuminexled.com | Website: www.illuminexled.com

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6