
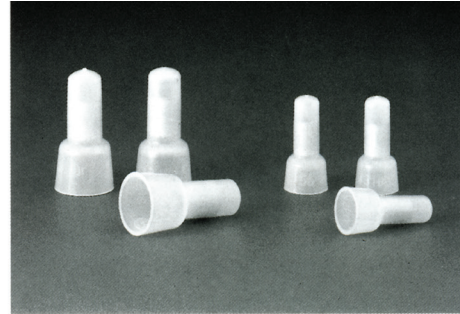


CLOSED-END CONNECTORS



B

DIMENSIONS:

Model	A		B		C		D		E	
	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)
NPAA1	2.6	0.102	6.2	0.244	7.8	0.307	6.2	0.244	18.0	0.709
NPAB1	3.0	0.118	7.9	0.311	9.5	0.374	7.2	0.283	19.7	0.776
NPAC1	4.0	0.157	10.5	0.413	12.5	0.492	9.6	0.378	25.5	1.004

Model	Colour	Approval	Wire Range & Rating	Packing
NPAA1	Nature	c  US LISTED	300 Volt Temp 105°C (221°F) No. 22 – No. 18 AWG Max. 2 #20 w/1 #18 Min. 2 #22	Box of 100
NPAA1M	Nature			Bag of 1000
NPAB1	Nature	c  US LISTED	300 Volt Temp 105°C (221°F) No. 22 – No. 14 AWG Max. 1 #18 w/1 #14 Min. 2 #22	Box of 100
NPAB1M	Nature			Bag of 1000
NPAB1J	Nature			Jar of 350
NPAC1	Nature	c  US LISTED	300 Volt Temp 105°C (221°F) No. 22 – No. 10 AWG Max. 3 #18 w/1 #12 Min. 2 #22 w/2 #18	Box of 100
NPAC1M	Nature			Bag of 1000
NPAC1J	Nature			Jar of 250

- Housing material: Polyamide 66 (Nylon 66), UL 94V-2 self-extinguishing
- Crimping tools: Hand Tools – RAT-CE



Copper Stranded Wire Only