



LED FIXTURE

RIGID Series



LED Slim Panel RGD-SP

Slim design switchable CCT, now 120V & 347V



Features & Benefits

Type IC Rated – approved for direct contact with insulation

Isolated internal driver in junction box – fast and easy to install

Switchable CCT (30K/40K/50K)

Range of sizes (4", 6", 8" available)

Finish Color White (Interchangeable trim ring for black or brushed nickel finish)

Wet location rated

J-Box c/w 3x3 wire quick connectors, allowing for easy through wiring

Energy Star approved

L70 @ 50,000 Hrs

120V - TRIAC dimmable down to 10%, FT4 cable

347V - Non dimmable, FT6 cable

High CRI (80+)

120V / 347V LED Driver, PF>0.9

PC lens aluminium body

Beam angle 110°

Warranty


5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -20°C and +40°C

Applications

Residential / Commercial, Schools, Retirement Homes, University, Supermarkets, Shops, Hotels, Conference Rooms, Office Lighting, Show Room, Corridor, Kitchens etc.

Dimensional drawing

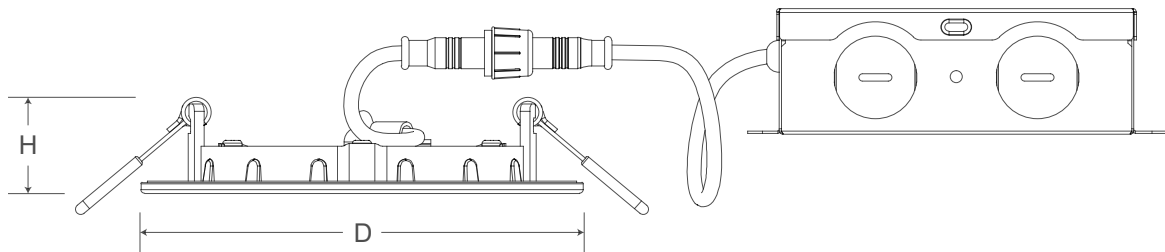

	M.O.D	Cut-Out	H
SP/4	4.92"	4"	0.96"
SP/6	6.77"	6.1"	0.96"
SP/8	9.13"	8.2"	0.96"



LED Slim Panel


RGD-SP

Ordering Information

Example: RGD-SP/4/8W/MULTI-K/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Finish Color	D	Options
RGD (Rigid)	SP (Slim Panel)	4 (4") 6 (6") 8 (8")	8W 10.5W 24.5W	MULTI-K (Multiple CCT, 30K/40K/50K Switchable)	Blank (120V) 347V	WH (White)	D (Dimmable)	Black Trim Ring Brush Nickel Trim Ring (Sell seperately)

Product Specification

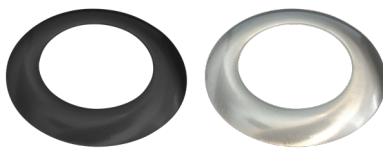Ordering Code	ES	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K) Adjustable	CRI	Beam Angle	Wet Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662134	Yes	RGD-SP/4/8W/MULTI-K/WH/D	8	120	50,000	650	30/40/50	>80	110°	Yes	Y	4.92" × 0.96"	6
3662221	Yes	RGD-SP/4/8W/MULTI-K/347V/WH	8	347	50,000	650	30/40/50	>80	110°	Yes	N	4.92" × 0.96"	6
3662135	Yes	RGD-SP/6/10.5W/MULTI-K/WH/D	10.5	120	50,000	1000	30/40/50	>80	110°	Yes	Y	6.77" × 0.96"	6
3662222	Yes	RGD-SP/6/10.5W/MULTI-K/347V/WH	10.5	347	50,000	1000	30/40/50	>80	110°	Yes	N	6.77" × 0.96"	6
3664130	Yes	RGD-SP/8/24.5W/MULTI-K/WH/D	24.5	120	50,000	2100	30/40/50	>80	110°	Yes	Y	9.13" × 0.96"	6
3664212	Yes	RGD-SP/8/24.5W/MULTI-K/347V/WH	24.5	347	50,000	2100	30/40/50	>80	110°	Yes	N	9.13" × 0.96"	6
3660094		RGD-SP/4/CCT/BK	RIGID 4" Slim Panel, Black Trim Ring for 3-CCT Selectable									4.92"	
3660095		RGD-SP/4/CCT/BN	RIGID 4" Slim Panel, Brush Nickel Trim Ring for 3-CCT Selectable									4.92"	
3662120		RGD-SP/6/BK	RIGID 6" Slim Panel, Black Trim Ring for 3-CCT Selectable									6.77"	
3662121		RGD-SP/6/BN	RIGID 6" Slim Panel, Brush Nickel Trim Ring for 3-CCT Selectable									6.77"	
3664113		RGD-SP/8/BK	RIGID 8" Slim Panel, Black Trim Ring for 3-CCT Selectable									9.13"	
3664115		RGD-SP/8/BN	RIGID 8" Slim Panel, Brush Nickel Trim Ring for 3-CCT Selectable									9.13"	