



Lightolier LED Performance Track Heads are an economical solution used for displays, accent, and task lighting. The selectable correlated color temperature allows for concentrated light in a variety of color options. With the two outputs, multiple mounting heights can be covered to ensure the desired illumination levels are met.


Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Qty: : _____
 Notes: _____

Fixture

example: THPL109SCTWH

Series	Adapters	Lumens / Wattage	CRI / CCT	Finish
THP	<input type="checkbox"/>	<input type="checkbox"/>	9SCT	<input type="checkbox"/>
THP Performance Track Head 24° Narrow Flood/36° Flood	L Lightolier J Juno	10 1000lm @ 11.5W 30 3000lm @ 32W	9SCT 80 CRI / Field Selectable CCT (2700K/3000K/ 3500K/4000K)	WH White (matte) BK Black (matte)

Dimensions

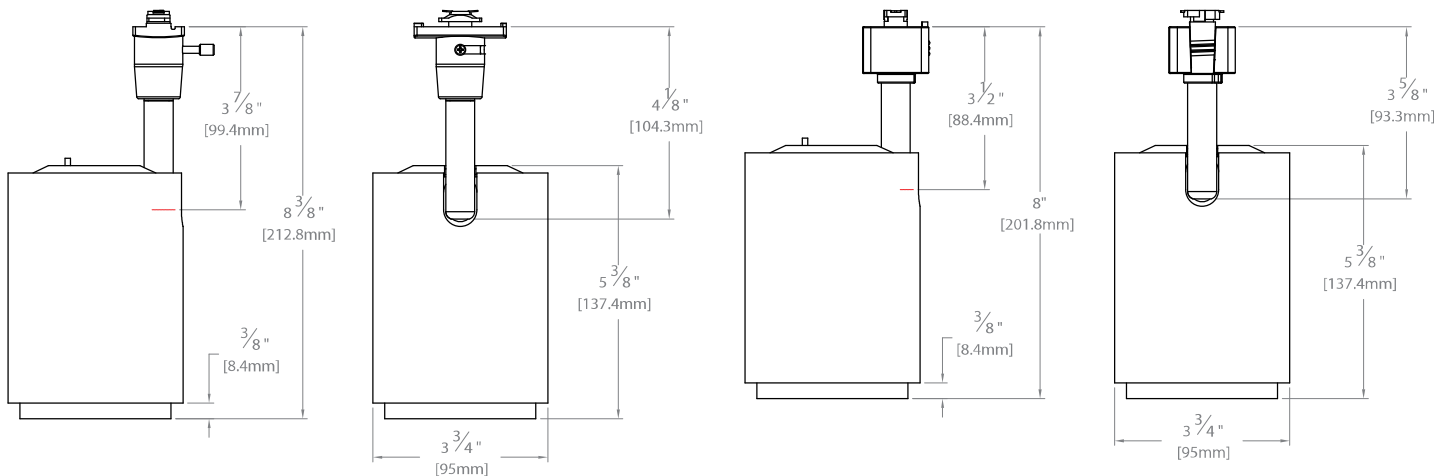

Features

- Track attachment fitting: Molded polycarbonate. Rotates into place with the use of a push tab.
- Push tab: Molded polycarbonate. Locks and detaches unit.
- Driver and optic housing: Aluminum. Horizontally rotates 330° and vertically rotates 90°.
- Movable contact: Solid brass.
- Integrated heat sink: Passive cooling, integrated into optic and driver housing.
- Lifetime: THP10: B50L70 = 50,000 hrs
THP30: B50L70 = 50,000 hrs
- Finish: Matte white and matte black.
- Install: Suitable for ceiling mounted track only. Compatible with Lytespan Lightolier track. Not compatible with extension wands.
- Light source: LED
- 24° Narrow Flood and 36° Flood reflectors included.

Electronic PSU Input Voltage 120V 60Hz

Specifications	Beam Angle	Lumens				Power	Efficacy	CBCP
		2700K	3000K	3500K	4000K			
THPL109SCTWH	36° Flood	1000lm	1000lm	1000lm	1000lm	11.5W	87lm/w	2869
THPL109SCTBK	36° Flood	1000lm	1000lm	1000lm	1000lm	11.5W	87lm/w	2869
THPJ109SCTWH	36° Flood	1000lm	1000lm	1000lm	1000lm	11.5W	87lm/w	2869
THPJ109SCTBK	36° Flood	1000lm	1000lm	1000lm	1000lm	11.5W	87lm/w	2869
THPL309SCTWH	36° Flood	2800lm	3000lm	3000lm	3000lm	32W	93lm/w	7132
THPL309SCTBK	36° Flood	2800lm	3000lm	3000lm	3000lm	32W	93lm/w	7132
THPJ309SCTWH	36° Flood	2800lm	3000lm	3000lm	3000lm	32W	93lm/w	7132
THPJ309SCTBK	36° Flood	2800lm	3000lm	3000lm	3000lm	32W	93lm/w	7132

Dimming

Driver	THP10	THP30
DVCL-153P (TRIAC)	>0%	>5%
DV-603PG (TRIAC)	>5%	>5%
AY-600P (TRIAC)	>5%	>0%
MACL-153M (TRIAC)	>5%	>5%

Labels

ETL listed.
 DLC Monopoints certified.
 5 year warranty.

