



WMCL4/6

LED WALL CYLINDER LIGHT



Selectable Light Direction



Switchable CCT
SWW2



Integrated Photocell



Factory Settings	
Light Output	Up/Down
CCT	4000K
Photocell	On

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

Achieve the perfect blend of style and performance with Lithonia Lighting® Wall Mount Cylinders. Enjoy thoughtfully designed features that make these cylinders as practical as they are stylish. Available in two sizes, the WMCL4 delivers 2,400 lumens, while the WMCL6 provides a powerful 4,800 lumens, ensuring the ideal amount of light for any application. A built-in switch lets you easily select up, down, or both lighting directions, simplifying installation and offering complete control over your illumination. Switchable color temperatures enable you to tailor the lighting to suit any environment. The built-in dusk-to-dawn photocell ensures energy-efficient, hands-free operation. Whether you're accentuating architectural features or creating general ambient lighting, the WMCL luminaires deliver a tailored, professional aesthetic perfect for residential and commercial projects alike.

Catalog	Size	Wattage	Lumens @50K	LPW	Beam Spread	Color	CCT	Voltage	Photocell	Emergency Battery	Cicode	Lead Time
WMCL4 P1 SWW2 A45 UVOLT PE DDBXD M4	4"	19	2,479	130	45 Degree	Dark Bronze	30/40/50K	UVOLT	On/Off	No	2877PY	Stock
WMCL6 P1 SWW2 A45 UVOLT PE DDBXD M4	6"	31	4,728	153	45 Degree	Dark Bronze	30/40/50K	UVOLT	On/Off	No	2877R1	Stock
WMCL4 P1 SWW2 A75 UVOLT PE DDBXD M4	4"	19	2,433	128	75 Degree	Dark Bronze	30/40/50K	UVOLT	On/Off	No	2903FT	Stock
WMCL6 P1 SWW2 A75 UVOLT PE DDBXD M4	6"	31	4,520	146	75 Degree	Dark Bronze	30/40/50K	UVOLT	On/Off	No	2903FU	Stock
WMCL4 P1 SWW2 A75 MVOLT PE E4WC DDBXD M4	4"	19	2,479	130	75 Degree	Dark Bronze	30/40/50K	MVOLT	On/Off	Yes	291271	10 Days
WMCL6 P1 SWW2 A75 MVOLT PE E4WC DDBXD M4	6"	31	4,520	146	75 Degree	Dark Bronze	30/40/50K	MVOLT	On/Off	Yes	291273	10 Days
WMCL4 P1 SWW2 A45 MVOLT PE E4WC DDBXD M4	4"	19	2,433	128	45 Degree	Dark Bronze	30/40/50K	MVOLT	On/Off	Yes	291277	10 Days
WMCL6 P1 SWW2 A45 MVOLT PE E4WC DDBXD M4	6"	31	4,728	153	45 Degree	Dark Bronze	30/40/50K	MVOLT	On/Off	Yes	29127G	10 Days




COMMERCIAL OUTDOOR

1 Acuity Way, Decatur, GA 30035 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
© 2025 Acuity Brands Lighting, Inc. All rights reserved

WMCL Family Cylinder
Rev. 06/30/25

	4"	6"
Length (inches)	14.0	18.0
Diameter (inches)	4.0	6.0
Depth (inches)	6.1	8.1
Weight (lbs)	5.0	7.5

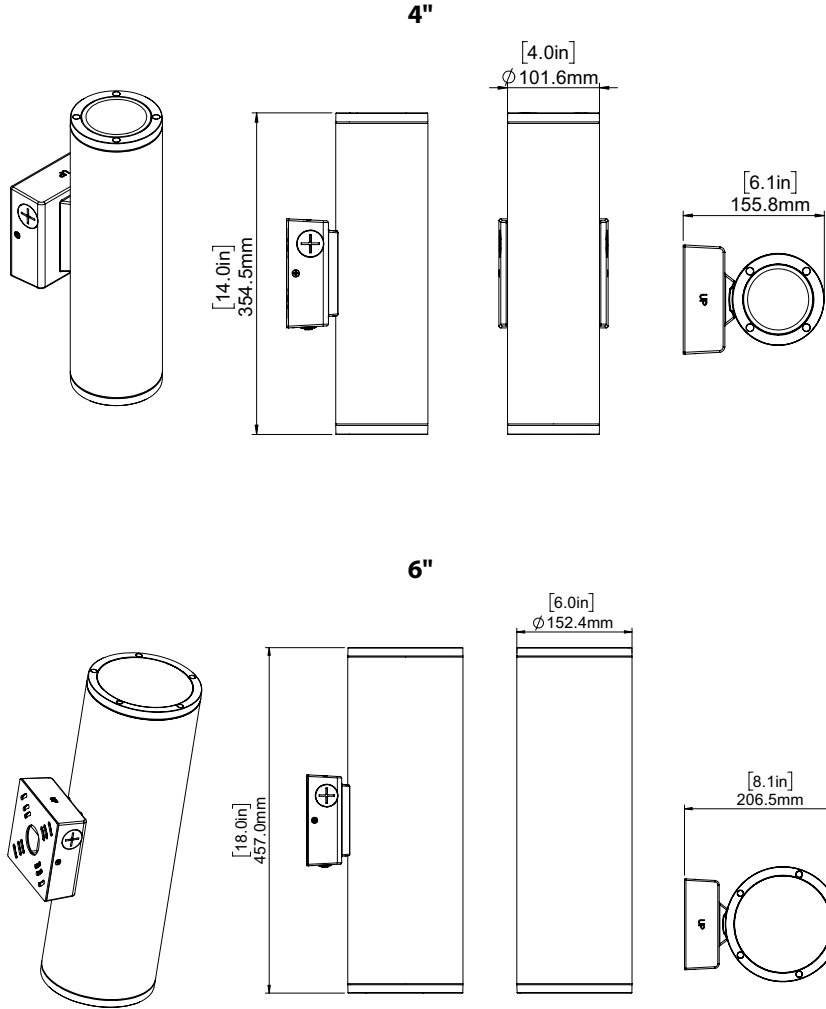

FEATURES & SPECIFICATIONS

- INTENDED USE**
Provides years of maintenance-free illumination for outdoor use in residential & commercial applications.
Ideal for applications such as lighting walkways and stairways for safety and security.

CONSTRUCTION
Cast-aluminum housing with corrosion-resistant paint in dark bronze. Other colors available upon request.

OPTICS
80 CRI
Switchable CCTs 30K/40K/50K
Uplight and Downlight standard on unit and is field adjustable
Photocell is standard and can be turned on/off via switch
Glass lens protects the LED from moisture, dirt and other contaminants.

LUMEN MAINTENANCE
The LED will deliver 70% of its initial lumens at 50,000 hour average LED life.

ELECTRICAL
UVOLT driver operates on any line voltage from 120-347V
Operating temperature -40°C to 40°C.
4KV surge protection standard.

- INSTALLATION**
Surface mounts to universal junction box (provided by others).

LISTINGS
UL Listed to U.S. and Canadian safety standards for wet locations.
Tested in accordance with IESNA LM-79 and LM-80 standards.
Fixture is IP66 rated for wet locations.

WARRANTY
5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions
Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. The product images shown are for illustration purposes only and may not be an exact representation of the product.
Specifications subject to change without notice.