


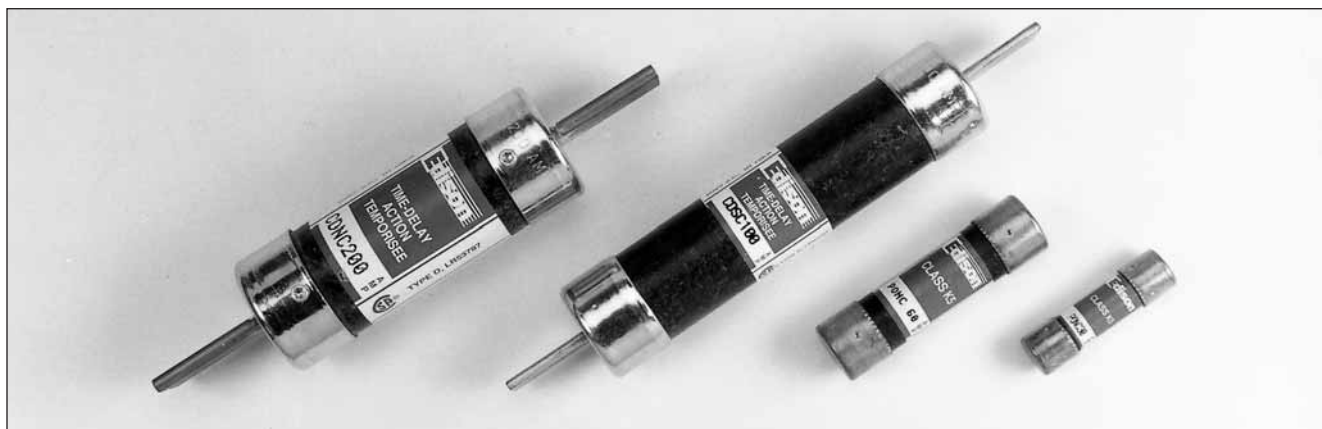

**Standard Dimension Fuses with 10kA Minimum Interrupting Rating;
CSA Certified to C22.2 No. 59.1**


Time-Delay

Volts	Ref.	Amp Ratings	Ctn. Qty.
600Vac	CDSC*	Below 10A use ECSR 10, 12, 15, 20, 25, 30, 35, 40, 45, 50, 60	10
		70, 80, 90, 100	5
		110, 125, 150, 175, 200, 225, 250, 300, 350, 400, 450, 500, 600	1
250Vac	CDNC*	Below 10A use ECNR 10, 12, 15, 20, 25, 30, 35, 40, 45, 50, 60	10
		70, 80, 90, 100	5
		110, 125, 150, 175, 200, 225, 250, 300, 350, 400, 450, 500, 600	1


One-Time

Volts	Ref.	Amp Ratings	Ctn. Qty.
600Vac	KOS**	1, 2, 3, 4, 5, 6, 7, 8, 10, 12, 15, 20, 25, 30, 35, 40, 45, 50, 60	10
		70, 80, 90, 100	5
		110, 125, 150, 175, 200, 225, 250, 300, 350, 400, 450, 500, 600	1
250Vac	KON**	1, 2, 3, 4, 5, 6, 7, 8, 10, 12	10
	PONC***	15, 20, 25, 30, 35, 40, 45, 50, 60 (CSA 'P')	
	KON	70, 80, 90, 100	5
		110, 125, 150, 175, 200, 225, 250, 300, 350, 400, 450, 500, 600	1

Dimensions - in (mm)



Ferrule Design—1 through 60 Amps



Knife Blade—70 through 600 Amps



Volts	Catalog Number	Amps	Max. A	Min. B	Min. C	D	E	F
250Vac	CDNC* PONC*** KON*	1-30	2.0 (50.8)	0.56 (14.3)	—	—	—	—
		35-60	3.0 (76.2)	0.81 (20.6)	—	—	—	—
		70-100	5.88 (149.4)	—	1.0 (25.4)	—	0.13 (3.2)	0.75 (19.1)
		110-200	7.3 (185.4)	—	1.38 (34.9)	4.13 (104.8)	0.19 (4.8)	1.13 (28.6)
		225-400	8.63 (219.2)	—	1.88 (47.6)	4.63 (117.5)	0.25 (6.4)	1.63 (41.3)
		450-600	10.38 (263.7)	—	2.25 (57.2)	5.19 (131.8)	0.25 (6.4)	2 (50.8)
600Vac	CDSC* KOS*	1-30	5.0 (127.0)	0.81 (20.6)	—	—	—	—
		35-60	5.5 (139.7)	1.06 (27.0)	—	—	—	—
		70-100	7.88 (200.2)	—	1.0 (25.4)	—	0.13 (3.2)	0.75 (19.1)
		110-200	9.63 (244.6)	—	1.38 (34.9)	6.13 (115.6)	0.19 (4.8)	1.13 (28.6)
		225-400	11.63 (295.4)	—	1.88 (47.6)	7.13 (118.1)	0.25 (6.4)	1.63 (41.3)
		450-600	13.38 (339.9)	—	2.25 (57.2)	8.19 (208.0)	0.25 (6.4)	2 (50.8)


*CDSC & CDNC are CSA certified Type "D".

** KON 1-12A and KOS 1-60A are not CSA Certified.


*** PONC are CSA certified Type "P".

Average Time-Current Curves

Cat. No. KON/PONC 250Vac

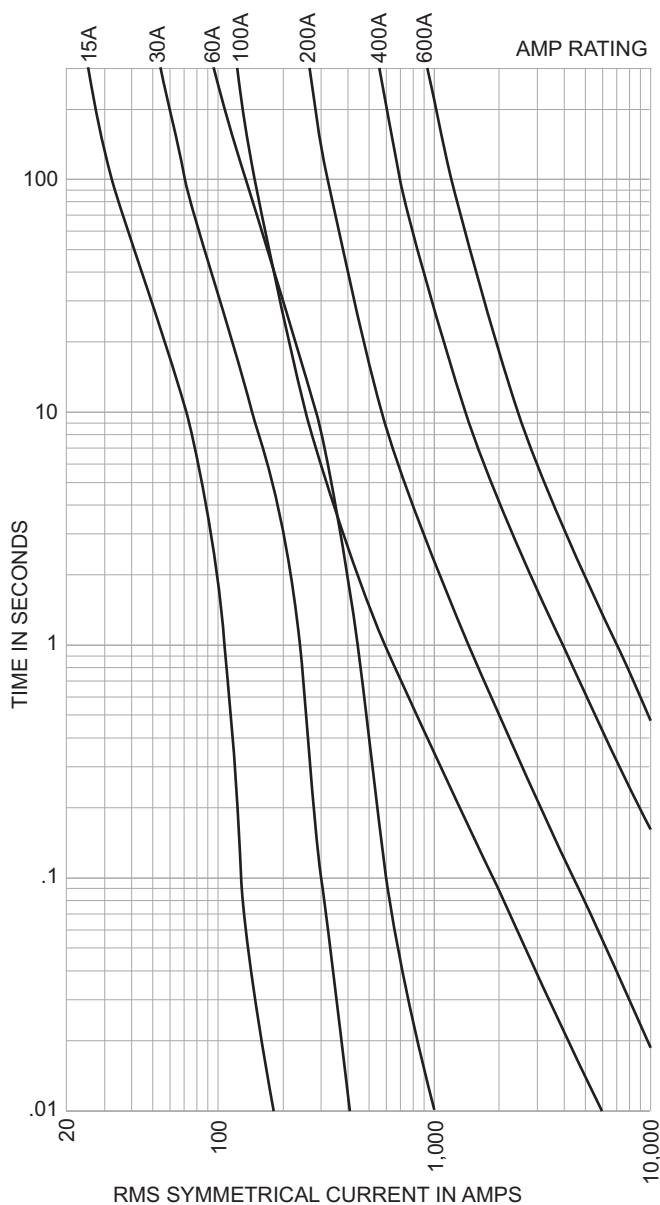


Cat. No. KOS 600Vac

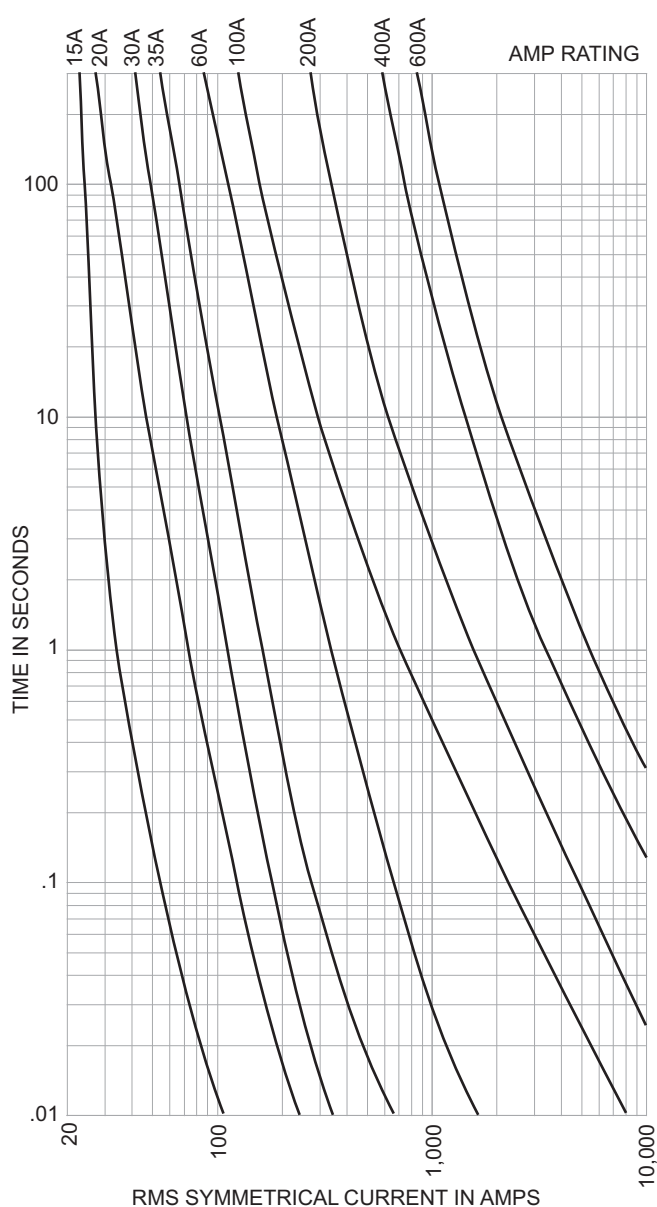

Average Time-Current Curves

Cat. No. CDNC 250Vac

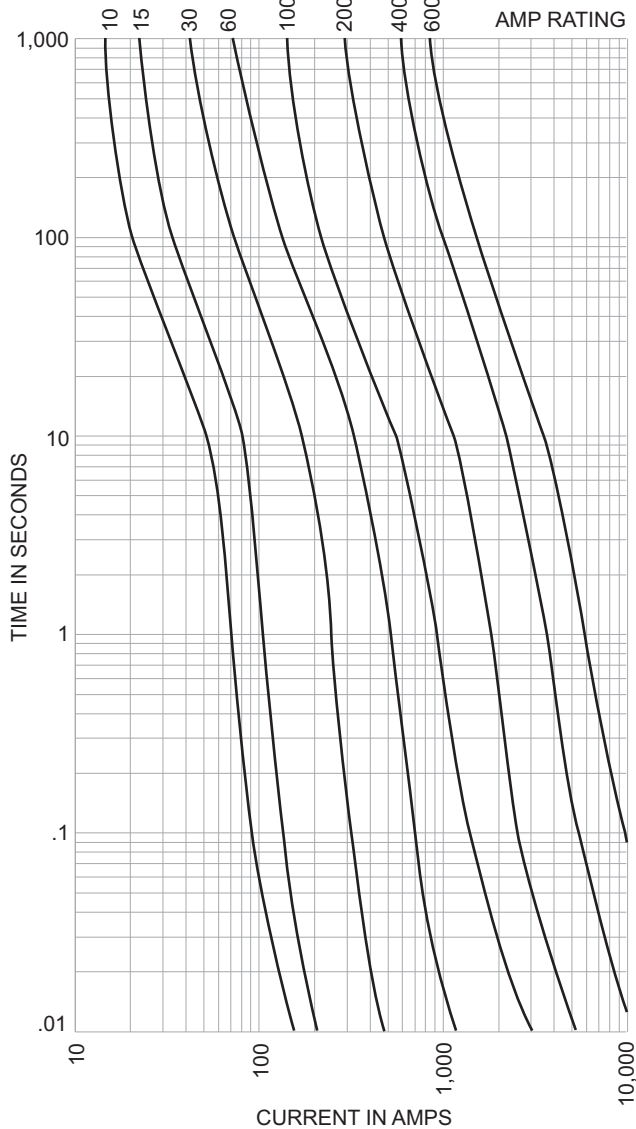

Cat. No. CDSC 600Vac

